



Corrigendum

Corrigendum to “Two-step co-sintering method to fabricate anode-supported $\text{Ba}_3\text{Ca}_{1.18}\text{Nb}_{1.82}\text{O}_{9-\delta}$ proton conducting solid oxide fuel cells” [Power 215 (2012) 221–226]Siwei Wang^a, Lei Zhang^a, Zhibin Yang^a, Lingling Zhang^a, Shumin Fang^a, Kyle Brinkman^b, Fanglin Chen^{a,*}^a Department of Mechanical Engineering, University of South Carolina, 300 Main Street, Columbia, SC 29208, USA^b Savannah River National Laboratory, Aiken, SC 29808, USA

The authors regret that the following two errors have been made:

(1) In both Figs. 4(a) and 5(a), the unit of the current density in the X-axis should be (A cm^{-2}), not (mA cm^{-2}).

(2) The value in the X-axis in Fig. 5(a) was mistakenly plotted using current, not current density.

The authors would like to apologise for any inconvenience caused.

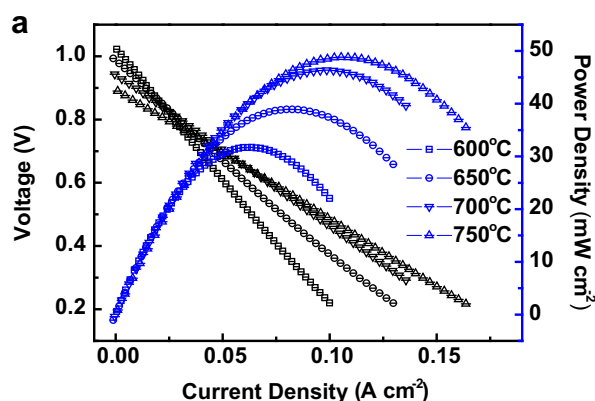


Fig. 4. (a)

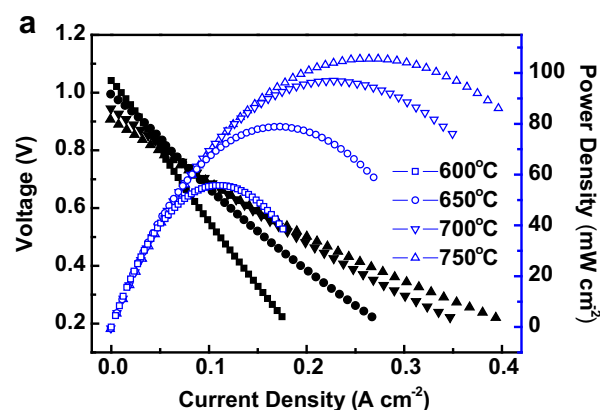


Fig. 5. (a)

DOI of original article: <http://dx.doi.org/10.1016/j.jpowsour.2012.05.009>.

* Corresponding author. Tel.: +1 803 777 4875; fax: +1 803 777 0106.

E-mail address: chenfa@cec.sc.edu (F. Chen).